

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 388 506 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
11.02.2004 Bulletin 2004/07

(51) Int Cl.7: **B65G 45/16**

(21) Application number: **03016605.2**

(22) Date of filing: **29.07.2003**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK**

(72) Inventor: **Dal Ferro, Bortolo Giulio**  
**36030 Montecchio Precalcino (VI) (IT)**


(74) Representative: **Bonini, Ercole**  
**c/o STUDIO ING. E. BONINI SRL**  
**Corso Fogazzaro 8**  
**36100 Vicenza (IT)**

(30) Priority: **08.08.2002 IT VI20020180**

(71) Applicant: **Dal Ferro, Bortolo Giulio**  
**36030 Montecchio Precalcino (VI) (IT)**

(54) **Cleaning scraper with modified blade holder**

(57) A cleaning doctor (1) for conveyor belts (N) is disclosed, comprising a fixed casing (2) supporting one or more frames (3; 21), each frame being provided with a doctor blade (5) in contact with the surface (S) to be scraped of the conveyor belt (N). The doctor blade (5) is arranged in a groove (6) which is made in a blade holder (7; 20) associated to said frame (3; 21).

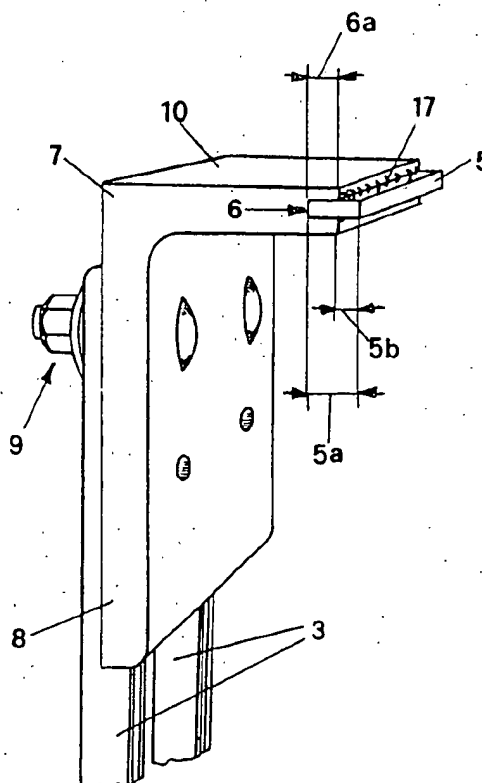

**FIG.8**

**EP 1 388 506 A1**

## Description

[0001] The present invention relates to a cleaning doctor for conveyor belts with modified blade holder.

[0002] It is well known that the surfaces of conveyor belts more particularly if they are used to convey powder and wet substances, should be kept clean by means of devices adapted to prevent adhesion of the material.

[0003] To this purpose in the discharge area of the conveyor belts there are proper cleaning doctors provided with blades scraping the belt surface.

[0004] A cleaning doctor of the prior art is shown in the isometric view of Fig. 1 where it is indicated with P and generally comprises a fixed casing connected to the frame supporting the conveyor belt and to the floor, a plurality of frames T being applied to the casing.

[0005] Each frame T is connected to the fixed casing I and a doctor blade L is associated to the frame and can be seen more particularly in Figs. 2 and 3, said blade being in contact with the surface S to be scraped of the conveyor belt N.

[0006] The frames T are removably applied to the casing I and are mutually aligned so as to define on the surface S of the conveyor belt N a scraping line X shown in Fig. 1.

[0007] With particular reference to Fig. 2 one can see that each doctor blade L is associated to a blade holder E in its turn connected to the frame T through screw means as shown in Fig. 3.

[0008] One can see particularly in Figs. 4 and 5 that by using the blade holder E having an L shape, it is possible to scrape easily the surface S of the belt N at the lower part or the front part of the discharge end, or even in other different positions not shown in the drawings.

[0009] The provision of the L shaped blade holder E is therefore very useful because it allows to arrange the blade at an angle to the surface of the conveyor belt and in different working positions by modifying the position of the frames T thus keeping substantially unchanged the position of the fixed casing I.

[0010] More particularly in the enlargement of Fig. 3 one can see that each doctor blade L has a face leaning on the blade holder E at a recessed step R made in the blade holder E.

[0011] The blade can be fixed by adhesives, adhesives and screws or by braze welding.

[0012] The drawbacks shown by said fastening systems consist in that they have a not sufficiently firm constraint between blade L and blade holder E so that in use the blade L may easily get detached from the blade holder E.

[0013] Moreover the fastening systems by braze welding are quick but they have the drawback to cause deformation of the doctor blade and the relevant blade holder during the brazing operation occurring at high temperature through an oxyacetylene torch.

[0014] As to the fastening systems by adhesives, they use adhesive resins, preferably two component epoxy

resins; the connection is much quicker than braze welding and does not cause deformations because it occurs at room temperature.

[0015] An improvement of the mechanical strength is obtained by fastening with screws that however has also some drawbacks.

[0016] Indeed in use the blade runs out and when wear is near the screw insertion hole, the blade breaks off and gets detached from the blade holder thus requiring intervention of the service staff.

[0017] All the above mentioned connection systems have therefore the drawback of carrying out poorly resistant joints or anyway subject to frequent failures consequently requiring repeated service interventions.

[0018] It is clear that each service intervention involves stopping the plant and therefore the user, in addition to the maintenance cost, should also bear the cost of lost production.

[0019] A further fastening system provides to use fastening plates where the doctor blade L is constrained to the corresponding blade holder E by pressure of a plate that is fixed to the blade holder with screws.

[0020] This fastening system is frequently used when the blade holders are straight and not shaped with an L profile.

[0021] This fastening system is better from the point of view of strength in comparison with the previously mentioned fastening systems, but it has the drawback to be rather expensive also because it requires to machine the blade holder and to use screws, nuts and plates.

[0022] Moreover this system is also difficult to be installed especially during maintenance and repair.

[0023] The present invention aims at overcoming said drawbacks.

[0024] More particularly a first object of the invention is to provide a cleaning doctor for conveyor belts which is more reliable relative to the cleaning doctors of the prior art.

[0025] Another object of the invention is to provide a cleaning doctor having lower operating costs relative to equivalent cleaning doctors of the prior art.

[0026] The foregoing objects are attained by a cleaning doctor for conveyor belts that according to the main claim comprises a fixed casing supporting one or more frames, each frame being provided with at least a doctor blade in contact with the surface to be scraped of said conveyor belt and is characterized in that said doctor blade is arranged in a groove made in a blade holder associated to said frame.

[0027] According to the invention the blade holder has an L shaped cross section and is made from a commercially available structural material which is cut to size and machined to receive the holes for fixing to the frame and the groove receiving the doctor blade.

[0028] The groove has an U shaped profile seen in cross section and is made in the blade holder at the face of the projecting side facing the surface to be scraped.

[0029] In other embodiments the blade holder is made from a prismatic profile preferably in the form of a parallelepiped with rectangular cross section.

[0030] Preferably the groove is made by a milling operation.

[0031] The doctor blade consists of a prismatic element preferably parallelepipedal having a length at least equal to the length of the blade holder and a width greater than the depth of the U shaped groove so as to project from the blade holder after coupling.

[0032] Fastening of the blade to the relevant blade holder may occur by gluing or by mechanical fixed joint.

[0033] Advantageously the provision of the U shaped groove reduces oscillation of the blade in use to the minimum and this reduces the possibility that the blade gets detached by failure of the fastening means as it happens in the prior art.

[0034] Still advantageously it is possible to modify the cleaning doctors of the prior art simply changing the blade holders according to the invention.

[0035] The foregoing objects and advantages are hereinafter described with reference to the accompanying sheets of drawing in which:

- Fig. 1 is an isometric view of a cleaning doctor of the prior art;
- Fig. 2 is a side view of Fig. 1;
- Fig. 3 is an enlargement of a detail of Fig. 2;
- Figs. 4 and 5 show two different application forms of the cleaning doctor of Fig. 1;
- Fig. 6 is a partially exploded view of the cleaning doctor of present invention;
- Fig. 7 shows a detail of Fig. 6;
- Fig. 8 is an isometric view of another detail of the cleaning doctor of Fig. 6; and
- Fig. 9 is a constructional variation of a detail of the cleaning doctor of the invention.

[0036] The cleaning doctor of the invention is shown in a partially exploded view in Fig. 6 where it is generally indicated with 1.

[0037] It comprises a fixed casing generally indicated with 2, to which one or more frames 3 are applied through fastening means such as bolts 4.

[0038] One can see with reference also to the detail of Fig. 7 and the isometric view of Fig. 8, that the frame 3 is provided with a doctor blade 5 which is in contact with the surface S of the belt N to be scraped.

[0039] According to the invention the doctor blade 5 is arranged in a groove 6 made in a blade holder 7 having an L shaped cross section and associated to the frame 3.

[0040] More particularly in the blade holder 7 there is a first side 8 removably fixed to the frame 3 through fastening means consisting of bolts 9 and a second side 10 facing the surface S to be scraped, in which the groove 6 is made.

[0041] The groove 6 is made at the free end 10a of

the second side 10 along the face 10b facing the surface S to be scraped and has an U shaped profile when seen in cross section.

[0042] Preferably the groove 6 is made by a milling operation and although not shown in the drawings, its cross section may also have a profile different from the U shape.

[0043] With particular reference to Figs. 7 and 8 one can see that the length 5a of the doctor blade 5 is greater than that 6a of the groove 6 so that the doctor blade 5 projects from the face 10b of the blade holder 7 for an amount 5b.

[0044] Preferably to reduce the manufacturing cost, the blade holder 7 is made from an L shaped structural member available on the market that is cut down to size of length 7a at the user's choice.

[0045] Moreover the frame 3 is connected to the casing 2 by interposing elastic means 11 preferably made by an elastomeric block, in order to make the frame 3 yielding during the scraping operation.

[0046] To improve the possibility of adjusting the pressure of the doctor blade 5 on the surface S, at the end of the frame 3 there are adjusting means generally indicated with 12 known per se and consisting of a screw 13 inserted inside a threaded hole 14 made in the frame 3 and abutting against one of the plates 15 holding the elastic means.

[0047] Inside the groove 6 the doctor blade 5 is fixed through joining means that may comprise for instance adhesive material 16 of the two component epoxy kind which is interposed between the groove 6 and the blade 5.

[0048] In other embodiments the joining means consist of a welding that in this case is made by two seams 17 arranged on both sides of the doctor blade 5 at the face 10b of the blade holder 7.

[0049] In some other embodiments the connection may be obtained by mechanical fixed joint between groove 6 and blade 5.

[0050] The embodiment of the invention described and illustrated in the figures of the drawings, is particularly advantageous because it attains the object to connect the doctor blade 5 to the blade holder 7 in a more rigid and stable way in comparison with the embodiment of the prior art.

[0051] Indeed according to the invention most part of the volume of the doctor blade 5 is contained inside the groove 6 and being constrained at two opposite surfaces, it is less subject to oscillate and therefore to break or detach during the scraping operation.

[0052] Its greater stability involves a lower stress of the welding seams 17 or gluing 16 thus reducing possibility of failures, and increasing the useful life of the doctor 1 until the doctor blade 5 is worn out.

[0053] Obviously the doctor blade 5 and the blade holder 7 may be made of any material although the doctor blade is preferably made of sintered material such as Widia.

[0054] According to a constructional variation shown in Fig. 9, the doctor blade 5 is arranged in the groove 6 that is made in a blade holder 20 of parallelepipedal shape and associated to a frame 21.

[0055] Such an embodiment is particularly suitable when the cleaning doctor operates with the doctor blade 5 arranged vertically.

[0056] On the basis of the foregoing one can see that the cleaning doctor of the invention in both above described embodiments of the blade holders attains all the intended objects.


[0057] Many modifications may be made in the constructional stage to the cleaning doctor of the invention, to improve its functionality or make its construction cheaper.

[0058] Therefore the doctor blade 5 may for instance have a profile of any shape and the same applies also to the groove 6 in which it is arranged.


[0059] The foregoing and other possible variations that were neither described nor shown in this application, when they should fall within the scope of the appended claims, are to be considered covered by the present invention.

#### Claims

1. A cleaning doctor (1) for conveyor belts (N) comprising a fixed casing (2) supporting one or more frames (3; 21), each frame being provided with a doctor blade (5) in contact with the surface (S) to be scraped of said conveyor belt (N), **characterized in that** said doctor blade (5) is arranged in a groove (6) made in a blade holder (7; 20) associated to said frame (3; 21).
2. The cleaning doctor (1) according to claim 1) **characterized in that** said blade holder (7) has an L shaped cross section.
3. The cleaning doctor (1) according to claim 1) **characterized in that** said blade holder (20) has a rectangular cross section.
4. The cleaning doctor (1) according to claim 2) **characterized in that** said blade holder (7) has a first side (8) fixed to said frame (3) and a second side (10) facing said surface (S) to be scraped, said groove (6) receiving said doctor blade (5) being made in said second side (10).
5. The cleaning doctor (1) according to any of claim 1), 2) or 4), **characterized in that** said blade holder (7) is removably fixed to said frame (3) through fastening means (9).
6. The cleaning doctor (1) according to claim 4) **characterized in that** said groove (6) is made at the free end (10a) of said second side (10) along the face (10b) facing said surface (S) to be scraped.
7. The cleaning doctor (1) according to any of the preceding claims **characterized in that** said groove (6) has a U shaped cross sectional profile receiving said doctor blade (5).
8. The cleaning doctor (1) according to claim 7) **characterized in that** said doctor blade (5) has a width (5a) greater than that (6a) of said groove (6).
9. The cleaning doctor (1) according to claim 2) **characterized in that** said blade holder (7) is made by a standard structural profile available on the market having an L shaped cross sectional profile.
10. The cleaning doctor (1) according to claim 1) **characterized in that** said frame (3) is coupled to said casing (2) by interposition of elastic means (11).
11. The cleaning doctor (1) according to claim 10) **characterized in that** adjusting means (12) are provided between said frame (3) and said elastic means (11), adapted to change the pressure of said doctor blade (5) on said surface (S).

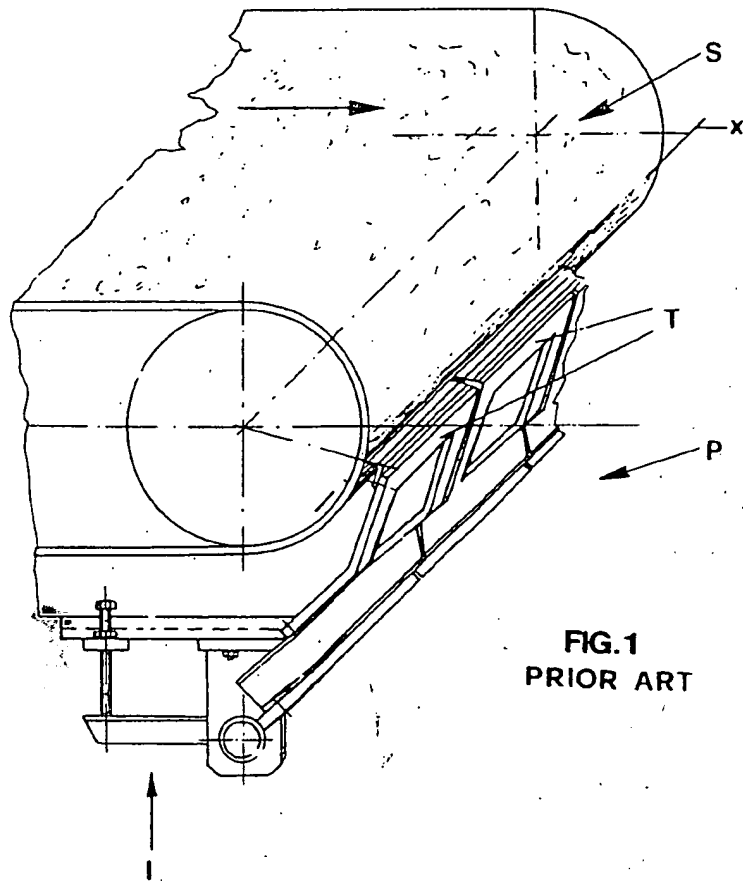


**FIG. 1**  
**PRIOR ART**

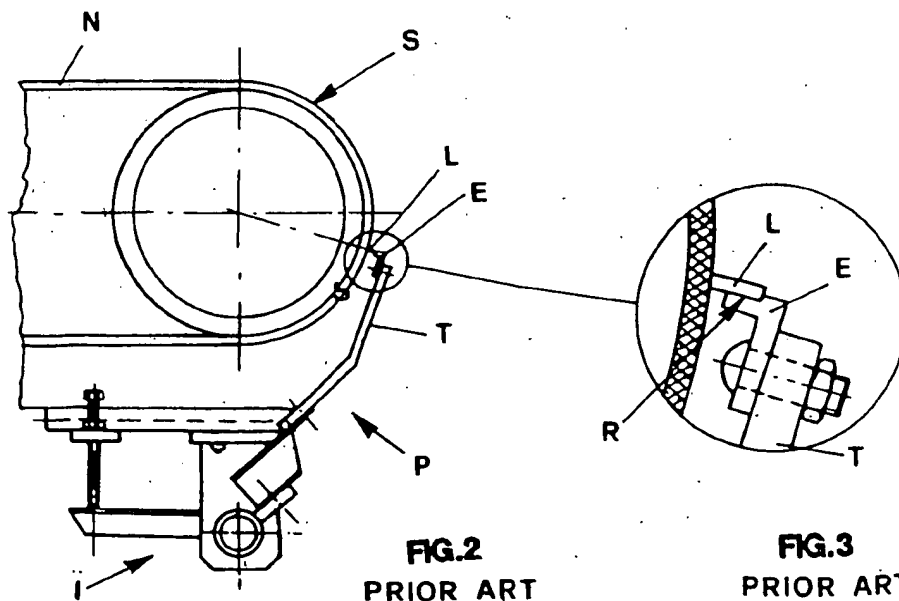


**FIG. 2**  
**PRIOR ART**


**FIG. 3**  
**PRIOR ART**

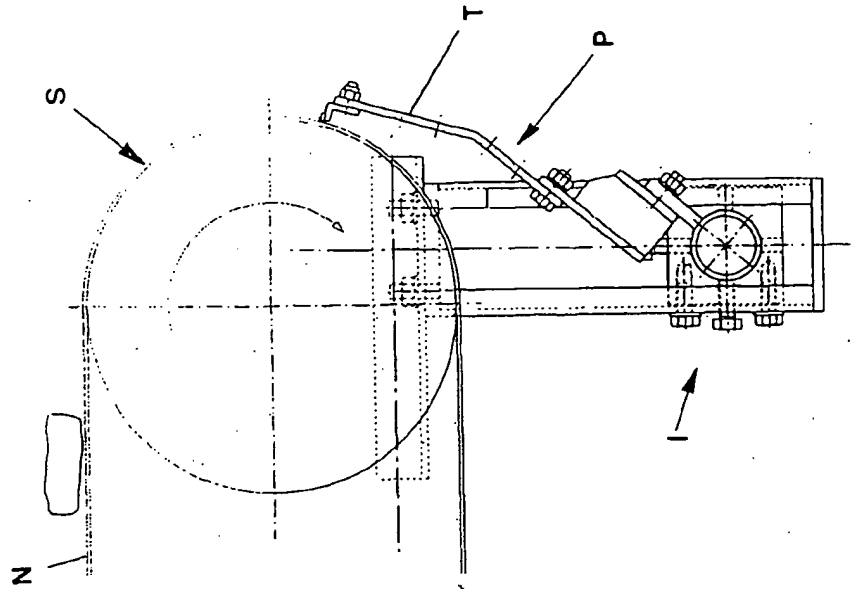

**FIG. 5**  
PRIOR ART

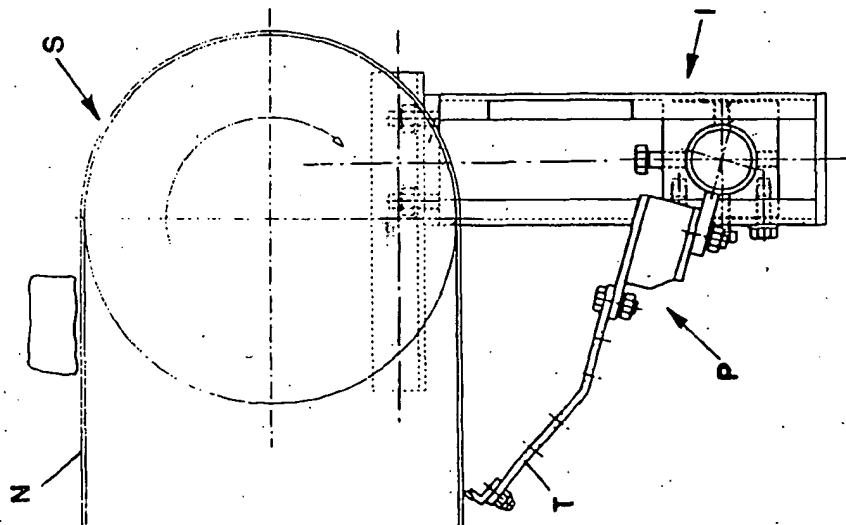

**FIG. 4**  
PRIOR ART

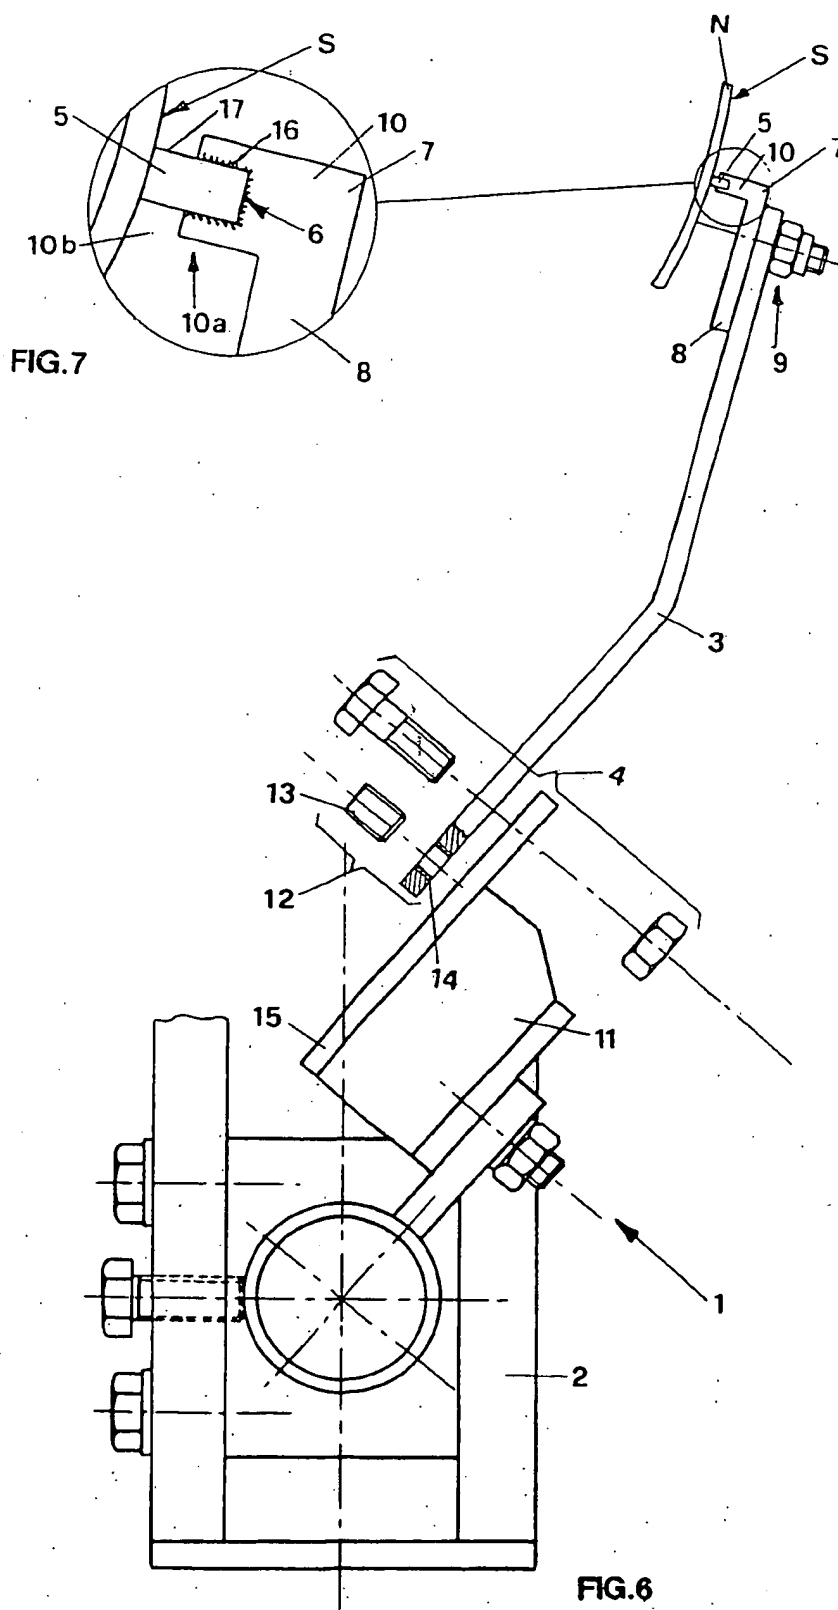

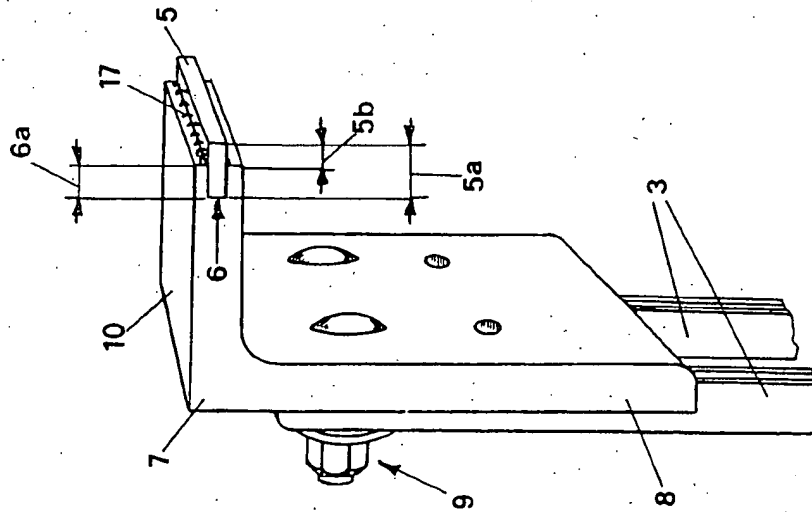


FIG. 8

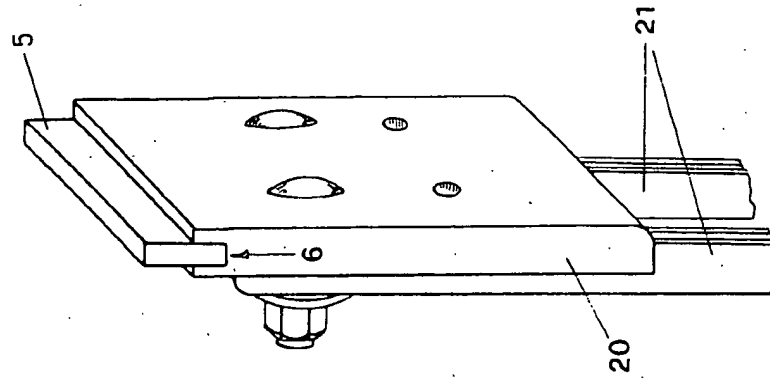


FIG. 9





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 03 01 6605

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 2 081 662 A (SALGAR SUPPLIES) 24 February 1982 (1982-02-24)	1,3,7,8	B65G45/16
Y	* page 2, line 38 - line 60 * * figures 1-4 *	2,4-6,9	
X	US 5 826 700 A (BRINK AREND JACOBUS) 27 October 1998 (1998-10-27)	1,3,7,10	
Y	* column 1, line 61 - column 2, line 42 * * figures 1-7 *	11	
Y	EP 0 869 090 A (DAL FERRO) 7 October 1998 (1998-10-07) * column 3, line 15 - column 5, line 6 * * figures 1-7 *	2,4-6,9, 11	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B65G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 24 November 2003	Examiner Papatheofrastou, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (POMC01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 6605

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-11-2003

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB 2081662	A	24-02-1982	NONE		
US 5826700	A	27-10-1998	AU	726588 B2	09-11-2000
			AU	3243397 A	05-02-1998
			GB	2315724 A , B	11-02-1998
			ZA	9706776 A	11-02-1998
EP 0869090	A	07-10-1998	IT	VI970052 A1	05-10-1998
			EP	0869090 A2	07-10-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82